

9mm Clutch Manual


Guidelines/Restrictions:

- This carrier is intended for bolt down applications.
- Bicycles must be equipped with quick release front wheel.
- Bicycle weight limit is 35lbs with this carrier.
- Forks equipped with carbon fiber dropouts or forks without safety tabs are not covered under this warranty.

Installation:

- 1) Remove the Quick Release Skewer from the body.
- 2) Using the body as a template, position and mark mounting holes. We recommend ¼" or 6mm bolts.
- 3) Install bolts and re-install the Quick Release Skewer.

Step 1) Remove the front wheel from the bicycle. The Quick Release uses cam action to clamp. Because of its adjustable nature, it is critical you understand how it works and how much force you need to apply to secure the fork. With the handle in the open position, load the fork straight onto the quick release. Be sure both fork dropouts are resting on the quick release. Turn the nut until finger tight. With the palm of your hand, close the handle. You should begin to feel resistance at the half-way point. The handle should close firmly and leave a small impression in the palm of your hand. If it is too loose, open the handle, tighten the nut ¼ turn and try again. If it is too tight (the handle does not close 180 degrees), open the lever back up and loosen the nut, and close the handle again. The handle should close firmly and securely.

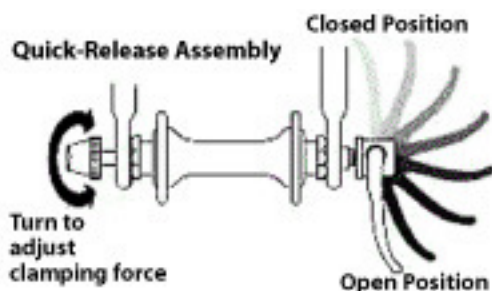

The Quick Release Skewer is not an on/off switch. You must close the handle with enough tension to hold the bike. Rock the bike side to side to ensure proper mounting. The fork should be properly seated and not move. If at all unsure, do not use.

Some mountain bike suspension forks have adjusters on the bottom of the fork, and the quick release can require more precision to operate. Our Locking Quick Releases are easier to use because of the size of the adjustment knob in these cases. They are available at www.rockymounts.com

Maintenance:

Put a drop of oil (chain lube, motor oil etc.) on the metal pivot points, threads and axle of the Quick Release periodically for smooth operation.

Caution:

- Remove Baby Seats, Panniers, U-Locks or items which could detach from the bicycle.
- Do not take the vehicle off road.

One Year Limited Warranty

Rocky Mounts Inc. Warrants to the original purchaser that the product will be free from defects in material and/or workmanship for one (1) year from the date of original retail purchase. Subject to the limitations stated below, Rocky Mounts will at its own expense during the one year warranty period repair or replace the defective component(s). The purchaser will be responsible for freight charges to Rocky Mounts. This warranty is only applicable if the instructions are correctly followed and the components are properly used. This warranty is not applicable if the defect is caused by normal wear and tear or exposure, the component(s) is damaged from misuse, abuse, theft, fire, accident, alteration, mixing third party components with the system and/or unlawful operation of the vehicle. Rocky Mounts Inc. cannot and does not assume responsibility for any damages to any property arising out of the improper attachment to a vehicle or a bicycle to the system or use of its products. This limited warranty applies to Rocky Mounts products and not to the products used in conjunction with Rocky Mounts products.

This warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind arising from the use or misuse of Rocky Mounts products.

ROCKY MOUNTS DOES NOT AUTHORIZE ANY PERSON TO ASSUME, ON ITS BE- HALF, ANY OTHER OBLIGATION OR LIABILITY.