

Clutch SD Installation Manual

Guidelines/Restrictions:

- This carrier is intended for Toyota, Nissan and GMC tracks only, use on others is at own risk.
- Bicycles must be equipped with quick release front wheel.
- Bicycle weight limit is 35lbs with this carrier.
- Forks equipped with carbon fiber dropouts or forks without safety tabs are not covered under this warranty.

Installation:


- 1) Remove the Quick Release Skewer from the main body by holding one end, and unscrewing the handle.
- 2) Place a split washer, then flat washer onto the bolt, pass the bolt through the outside mounting hole, and loosely thread the bolt into the rectangular gold plate. Repeat with the other bolt on the other mounting hole.
- 3) Insert the assembly into the track from either end. On the Toyotas, the square plates can only enter the track in one orientation. On the Nissan trucks, be sure the rectangular plates are oriented with the long side running vertically. The plates should now be inside the track, and the body outside the track as pictured below. If you have a situation where you cannot slide the assembly in from either side; slide just the gold rectangular bolts into the track, then fasten the body to the plates.
- 4) Tighten both bolts with the enclosed torx driver. Please check the orientation and tension of these bolts periodically. It should be firm and not move.
- 5) Re-install the Quick Release Skewer.



To Load a Bicycle

Step 1:

Remove front wheel from bicycle. Open the handle of the quick release so the black handle is straight and the fixed end points down. Load the fork onto the quick release so both fork ends are resting straight on the quick release. Close the handle by flipping it 90 degrees to the closed position. If it is too loose, open the handle and turn it like a screwdriver (clockwise to tighten, counter clockwise to loosen), and close the handle again. Re-adjust until a firm and positive snap is felt when closed.

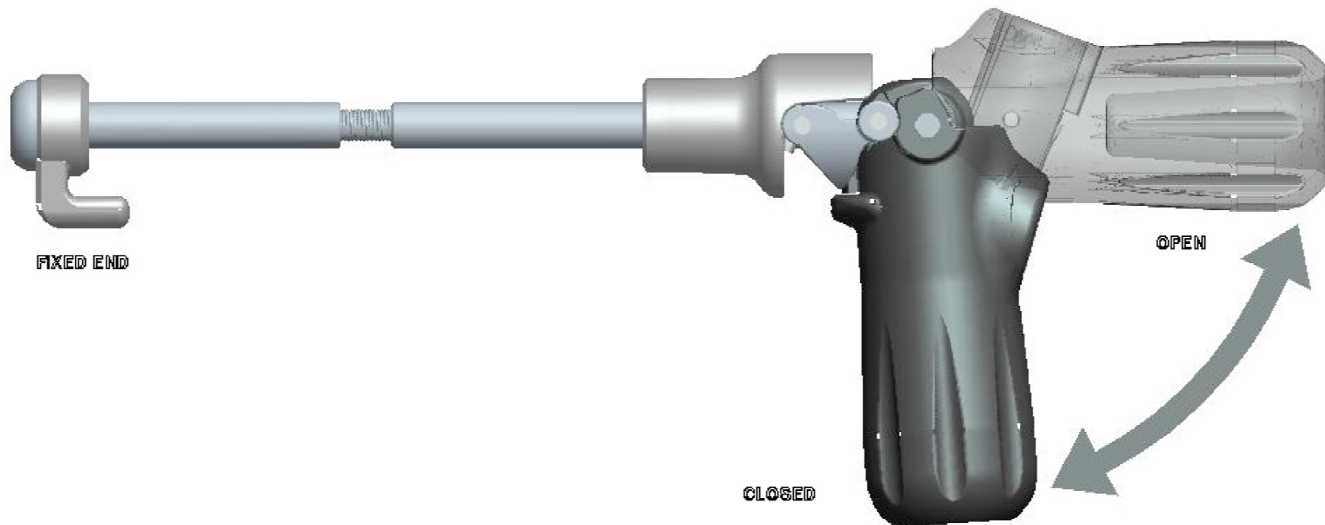

The Quick Release Skewer is not an on/off switch. You must close the handle with enough tension to hold the bicycle.

Rock the bicycle side to side to ensure proper mounting. The fork should be properly seated and not move. If unsure, please consult your dealer or RockyMounts. Failure to comply could result in the bicycle detaching with subsequent damage to the bicycle, vehicle, or other motorist.

Maintenance:

Put a drop of oil (chain lube, motor oil etc.) on the metal pivot points, threads and axle of the Quick Release periodically for smooth operation.

Caution:

- Remove Baby Seats, Panniers, U-Locks or items which could detach from the bicycle.
- Do not take the vehicle off road.
- Locks are only deterrents to thieves, RockyMounts cannot be held liable for stolen bicycles.

One Year Limited Warranty

Rocky Mounts Inc. Warrants to the original purchaser that the product will be free from defects in material and/or workmanship for one (1) year from the date of original retail purchase. Subject to the limitations stated below, Rocky Mounts will at its own expense during the one year warranty period repair or replace the defective component(s). The purchaser will be responsible for freight charges to Rocky Mounts. This warranty is only applicable if the instructions are correctly followed and the components are properly used. This warranty is not applicable if the defect is caused by normal wear and tear or exposure, the component(s) is damaged from misuse, abuse, theft, fire, accident, alteration, mixing third party components with the system and/or unlawful operation of the vehicle. Rocky Mounts Inc. cannot and does not assume responsibility for any damages to any property arising out of the improper attachment to a vehicle or a bicycle to the system or use of its products. This limited warranty applies to Rocky Mounts products and not to the products used in conjunction with Rocky Mounts products.

This warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind arising from the use or misuse of Rocky Mounts products.

ROCKY MOUNTS DOES NOT AUTHORIZE ANY PERSON TO ASSUME, ON ITS BE- HALF, ANY OTHER OBLIGATION OR LIABILITY.